

High-Line

THE CONVENIENCE OF AUTOMATIC

8 10 15 18

High-Line

THE CONVENIENCE OF AUTOMATIC

*“YOU HAVE GOT TO START WITH
THE CUSTOMER EXPERIENCE
AND WORK BACK TOWARDS
THE TECHNOLOGY – NOT THE
OTHER WAY AROUND”*

(Steve Jobs)



UPGRADE TO CONVENIENCE

UPGRADE A HIGH-LINE GARAGE DOOR FROM MANUAL TO POWER-OPERATED WITH THE NEW RANGE OF HIGH-LINE GARAGE DOOR OPENERS!





High-Line

THE CONVENIENCE OF AUTOMATIC

High-Line Garage Door Openers

Select out of four new models for a perfect fit to your door.

High-Line 10

10 m² door
800 N
myQ[®] enabled

10 m²

High-Line 8

8 m² door
600 N
myQ[®] enabled

8 m²



High-Line 18
18 m² door
1300 N
myQ[®] enabled

18 m²

High-Line 15
15 m² door
1000 N
myQ[®] enabled

15 m²





Garage Door Opener facts:

- 220-240 VAC, 50/60 Hz
- DC gearmotor permanent lubrication
- 54dB
- Automatic force
- Soft-Start / Soft-Stop
- LED light
- 0.8 W Stand-by power
- Belt drive
- myQ enabled

High-Line



Remote Control facts:

- 4 Channel
- 868 MHz EVO Code

All High-Line models include 2 remote controls


High-Line



Door dimensions and weights

Door openers	High-Line 8	High-Line 10	High-Line 15	High-Line 18
Power	600 N	800 N	1000 N	1300 N
Max door dimensions	8 m ²	10 m ²	15 m ²	18 m ²
Max door weight	100 kg	130 kg	180 kg	225 kg


8 10 15 18

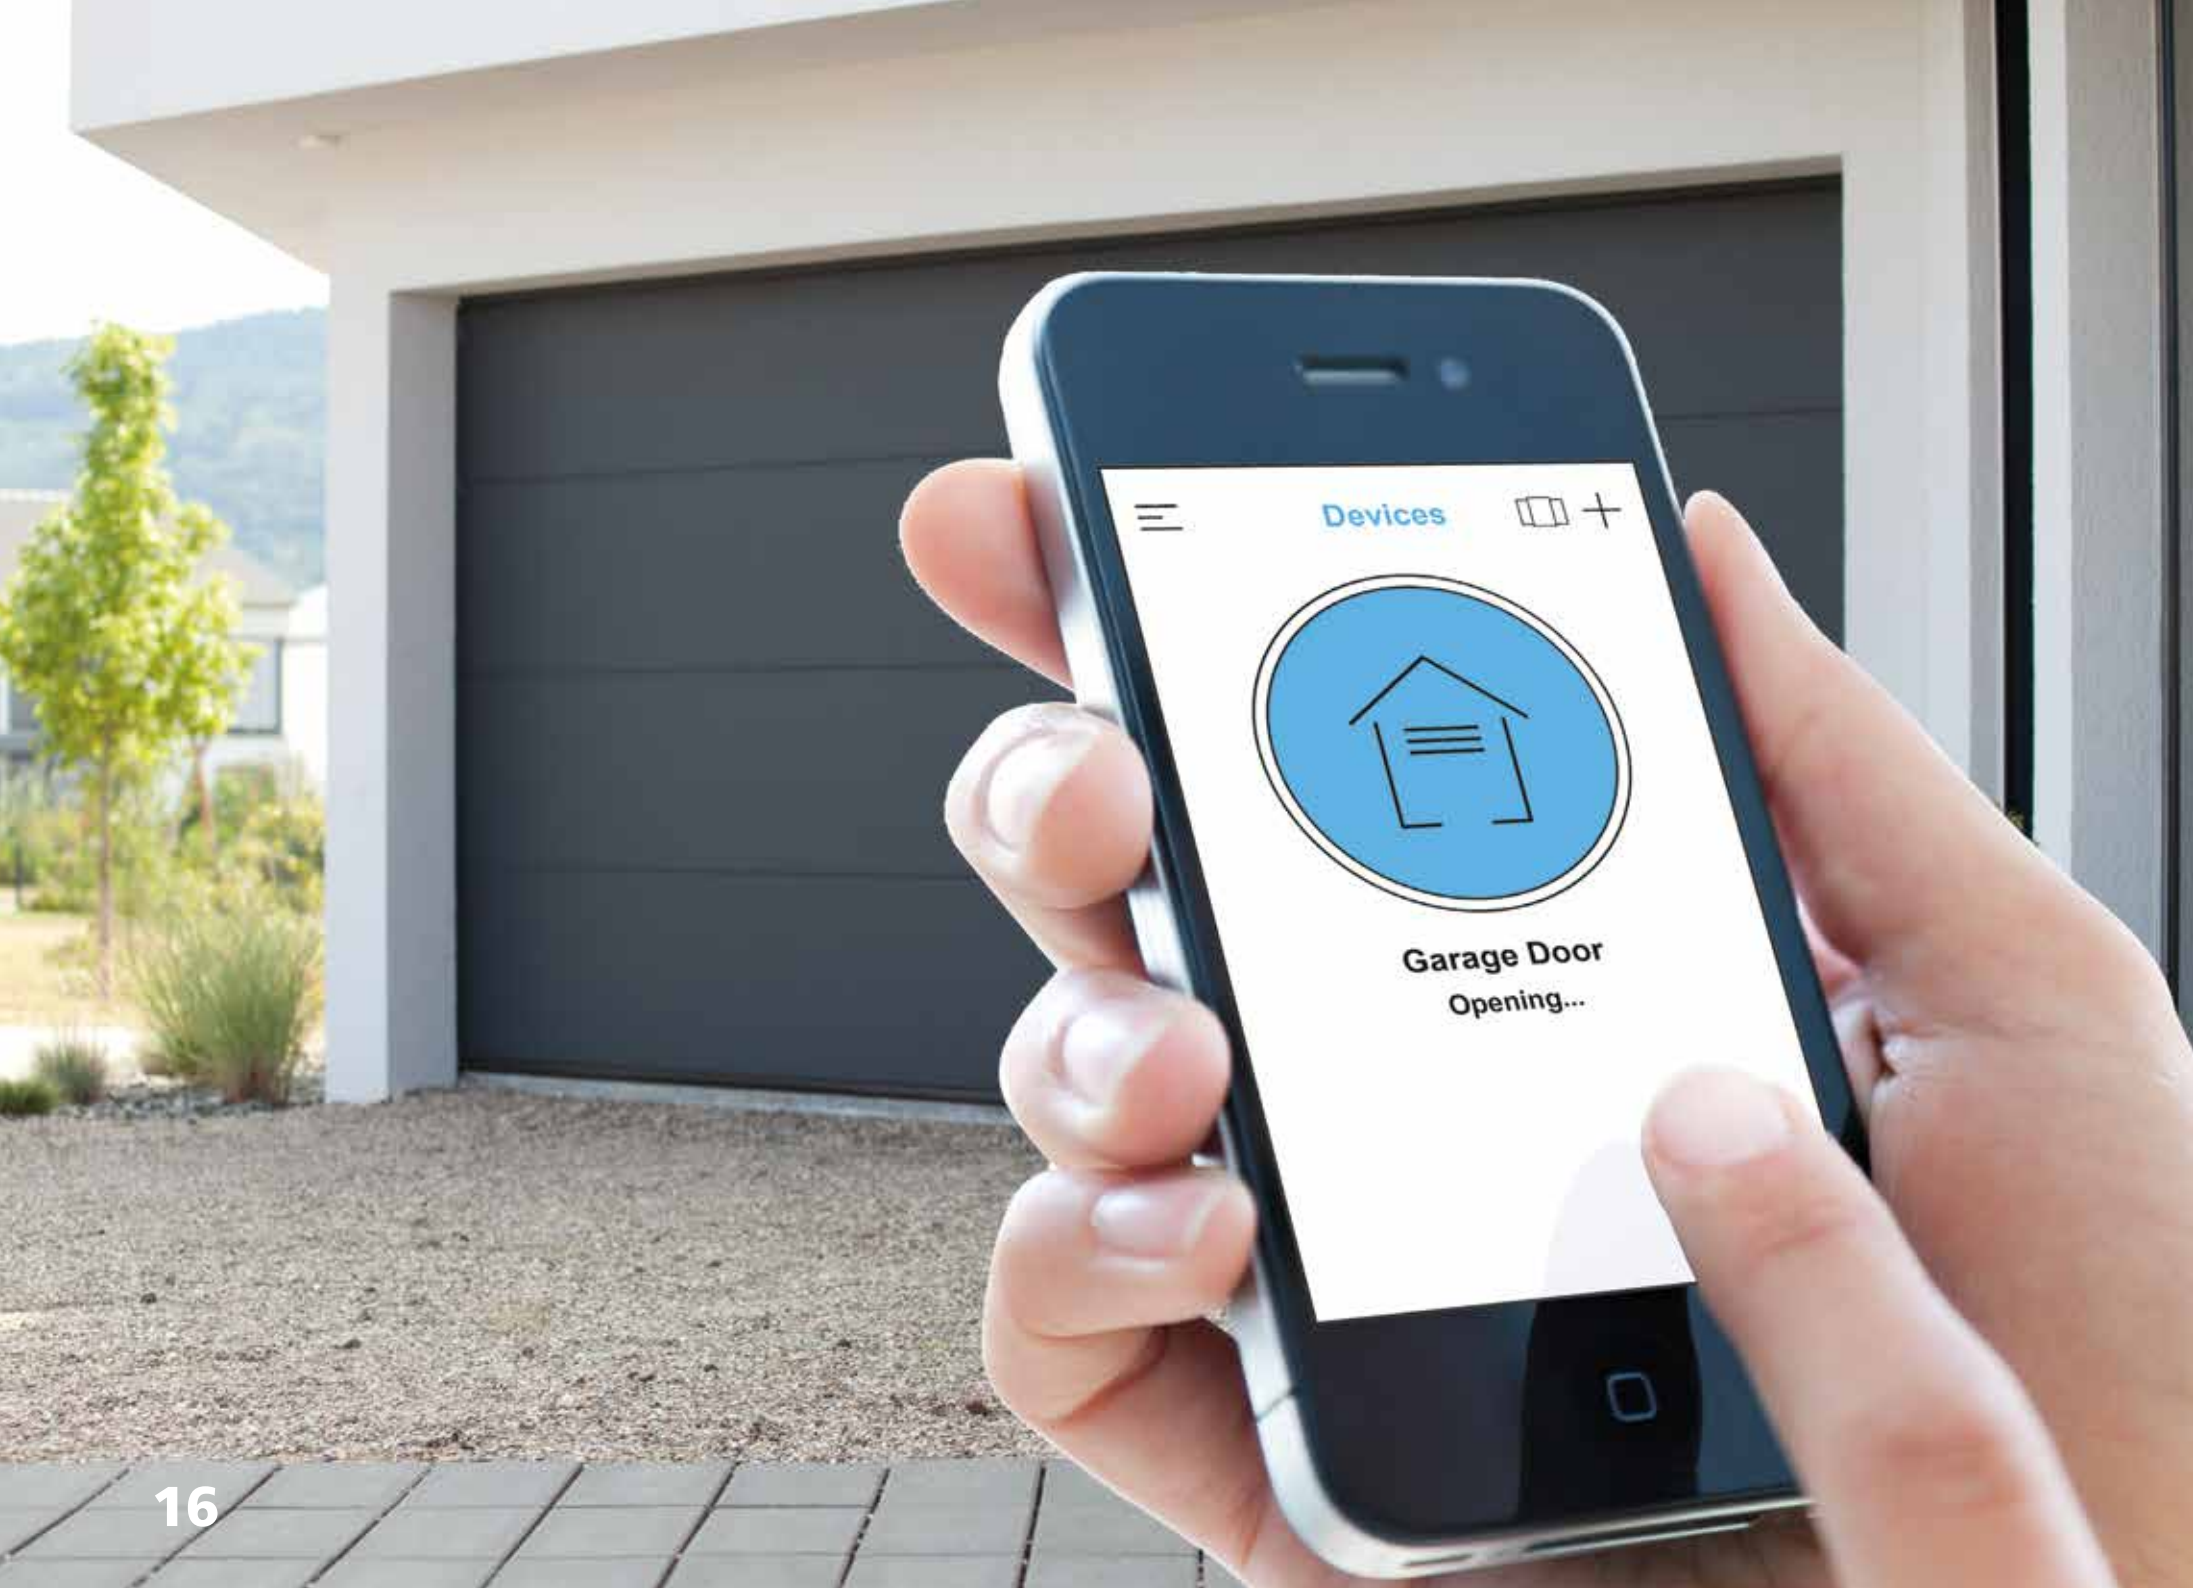

Smart Home: KNOW MORE, WORRY LESS

Upgrade the High-Line garage door opener with myQ smart-phone access. With myQ technology, you know any moment of the day if your door is open or closed and you can operate your door from anywhere in the world; convenient for opening the door to allow your children or package delivery person access to the garage!

All High-Line door openers are myQ enabled.

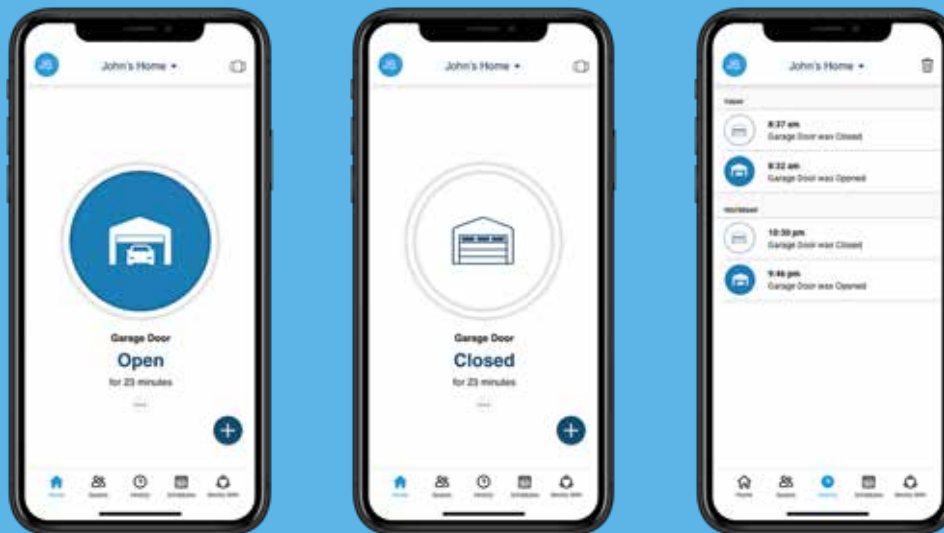

myQ®



Details Smart Technology

Easy to install:

1. Connect the gateway
2. Download the free myQ App
3. Create an account
4. Register your gateway
5. Access to your door(s)



myQ®



Details High-Line 8

- 600 N
- Max. door weight 100 kg
- Opening speed 160 mm/s
- Max. door 8 m²
- 6-Band (433 MHz / 868 MHz)
- Memory registers 16



High-Line



Scope of Delivery High-Line 8

- 1 x Motor head
- 2 x Remote control
- 1 x Wireless wall control 2-channel
- 1 x Rail bracket
- 1 x Hardware bag
- 1 x Header bracket
- 1 x Door bracket
- 1 x Adapter for gear wheel
- 1 x Curved door arm 45°
- 2 x C-bracket
- 2 x Hanging bracket
- 1 x Drawbar, belt-drive

Choice of rail:

- 1 x 2-piece rail, H < 2125 mm
- 1 x 2-piece rail, H < 2635 mm
- 1 x 2-piece rail, H < 3260 mm

High-Line



Details High-Line 10

- 800 N
- Max. door weight 130 kg
- Opening speed 200 mm/s
- Max. door 10 m²
- 6-Band (433 MHz / 868 MHz)
- Memory registers 180



High-Line



Scope of Delivery High-Line 10

- 1 x Motor head
- 2 x Remote control
- 1 x Wireless wall control 2-channel
- 1 x Rail bracket
- 1 x Hardware bag
- 1 x Header bracket
- 1 x Door bracket
- 1 x Adapter for gear wheel
- 1 x Curved door arm 45°
- 2 x C-bracket
- 2 x Hanging bracket
- 1 x Drawbar, belt-drive

Choice of rail:

- 1 x 2-piece rail, H < 2125 mm
- 1 x 2-piece rail, H < 2635 mm
- 1 x 2-piece rail, H < 3260 mm

High-Line



Details High-Line 15

- 1000 N
- Max. door weight 180 kg
- Opening speed 200 mm/s
- Max. door 15 m²
- 6-Band (433 MHz / 868 MHz)
- Memory registers 180



High-Line



Scope of Delivery High-Line 15

- 1 x Motor head
- 2 x Remote control
- 1 x Wireless wall control 2-channel
- 1 x Rail bracket
- 1 x Hardware bag
- 1 x Header bracket
- 1 x Door bracket
- 1 x Adapter for gear wheel
- 1 x Curved door arm 45°
- 2 x C-bracket
- 2 x Hanging bracket
- 1 x Drawbar, belt-drive

Choice of rail:

- 1 x 2-piece rail, H < 2125 mm
- 1 x 2-piece rail, H < 2635 mm
- 1 x 2-piece rail, H < 3260 mm

High-Line



Details High-Line 18

- 1300 N
- Max. door weight 225 kg
- Opening speed 130 mm/s
- Max. door 18 m²
- 6-Band (433 MHz / 868 MHz)
- Memory registers 180



High-Line



Scope of Delivery High-Line 18

- 1 x Motor head
- 2 x Remote control
- 1 x Wireless wall control 2-channel
- 1 x Rail bracket
- 1 x Hardware bag
- 1 x Header bracket
- 1 x Door bracket
- 1 x Adapter for gear wheel
- 1 x Curved door arm 45°
- 2 x C-bracket
- 2 x Hanging bracket
- 1 x Drawbar, belt-drive

Choice of rail:

- 1 x 2-piece rail, H < 2125 mm
- 1 x 2-piece rail, H < 2635 mm
- 1 x 2-piece rail, H < 3260 mm

High-Line

Silent & Safe

This new range of Garage Door Openers answers to all homeowner demands: stylish design, silent operation, high opening and closing speed, low energy consumption and safety for the user (CE-approved).

High-Line





Very easy & quick to install

The High-Line door openers are designed to fit to perfectly to the well-known High-Line garage doors. All accessories, and also the selectable drawbar, are easy to install. The control system and the matching remote controls program very easily. The reliability and proven technology of these door openers ensure that you do not have to come back to the door after installation. We fully guarantee the quality and we guarantee trouble-free operation and installation.

High-Line







Upgrade with optional accessories

Upgrade your High-Line garage door opener with a range of accessories that provide you with additional convenience, comfort and safety. These accessories fit and connect easily on your High-Line door opener.

- 4-channel remote control
- 4-channel universal remote control
- Keypad
- myQ Gateway
- myQ Remote Light
- Car Kit Clip Adapter-Set
- 3-Channel Universal Receiver
- Set of photocells (IR)



High-Line

THE CONVENIENCE OF AUTOMATIC

